

版次	ECN 编码	描述		设计/日期
1	EH19090026	初版发行		齐如军_2019/11/08
		改前	改后	

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
  - Materials:  
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Natural.  
Contact material: Copper alloy.
  - Current Rating: 0.5A.
  - Voltage Rating: 50V AC/DC.
  - Working Temperature: -40°C ~ +105°C.
  - Harmful material should be compliant to doc. "EI-0005" standards.
  - Product number matrix:





B E B A A X X X B X 00

Plating Code:


Definition	Code
● Tin plated	A
● Gold plated(Function area)	
flash B 15u"	F
10u" E 30u"	J
● Duplex plated(Function area)	
flash K 15u"	P
10u" N 30u"	U
● Standard: B	

Number of contacts  
030~080:30~80PIN  
100~140:100~140PIN

B:MPAD+REEL

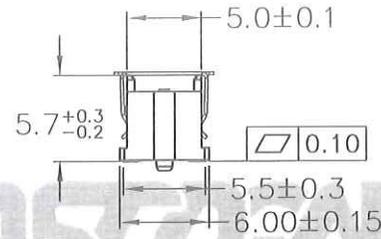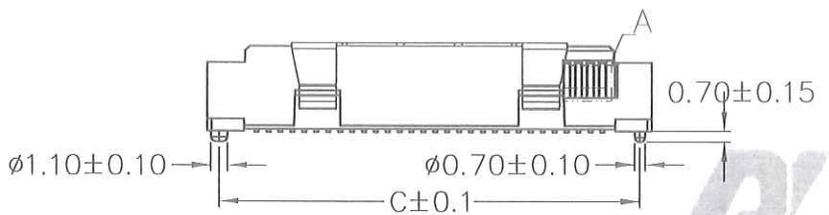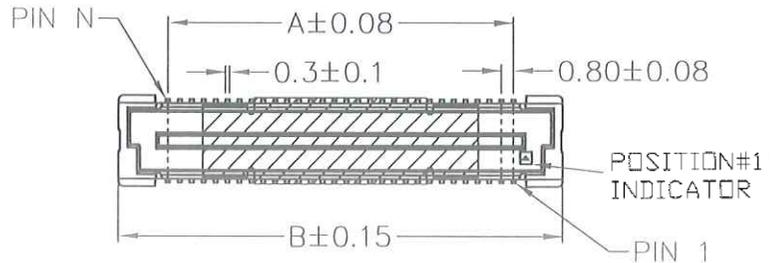

Function area  
single side gold  
plating

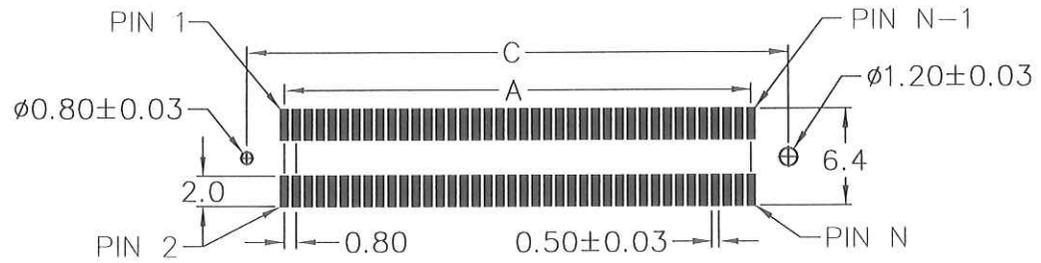

RECOMMENDED PCB LAYOUT  
(PCB TOLERANCE ±0.05)

CIRCUITS	DIM.A	DIM.B	DIM.C
30	11.20	17.80	16.20
40	15.20	21.80	20.20
50	19.20	25.80	24.20
60	23.20	29.80	28.20
80	31.20	37.80	36.20
100	39.20	45.80	44.20
120	47.20	53.80	52.20
140	55.20	61.80	60.20



TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE	2:1
UNIT	mm
SIZE	A4


DRAWN	齐如军
CHECK	齐如军
APPROVE	齐如军

DATE	2019/11/08
DATE	2019/11/11
DATE	2019/11/11

DWG. NO.	600-0000-2021
PARTS NO.(INTENDED USE)	BEBAAXXXBX00

TITLE	CUSTOMER DRAWING
-------	------------------

REV.	1
SHEET	1/3

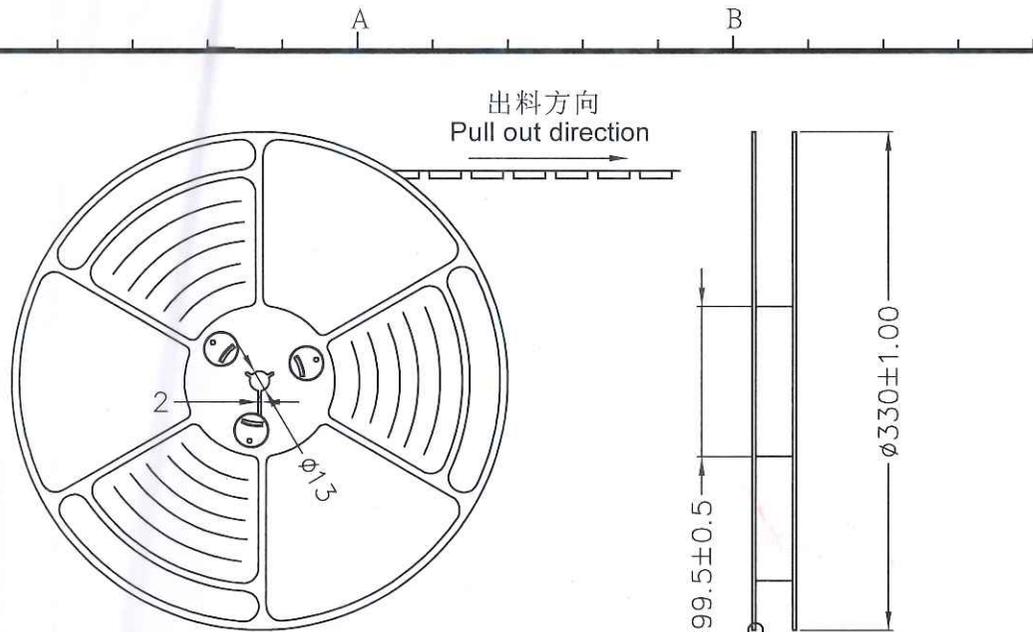


备注 (NOTES):

1. 带子引导长度  
Lead tape length

转绕方向

Pull out direction

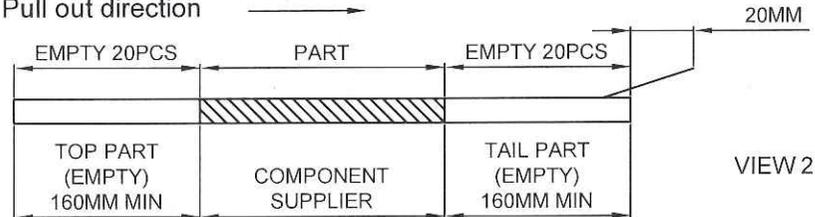

2. 上带剥拉力为: 0.2~1.3N (20gf~130gf)

Peeling off force of top tape :0.2~1.3N(20gf~130gf)



出货运输过程中一定注意: 卷带在运输过程中不能散开

This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

出料方向  
Pull out direction

VIEW 1

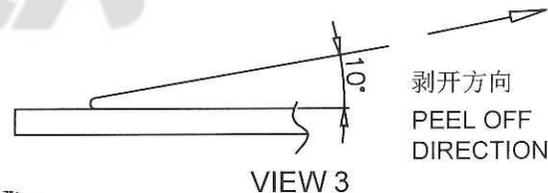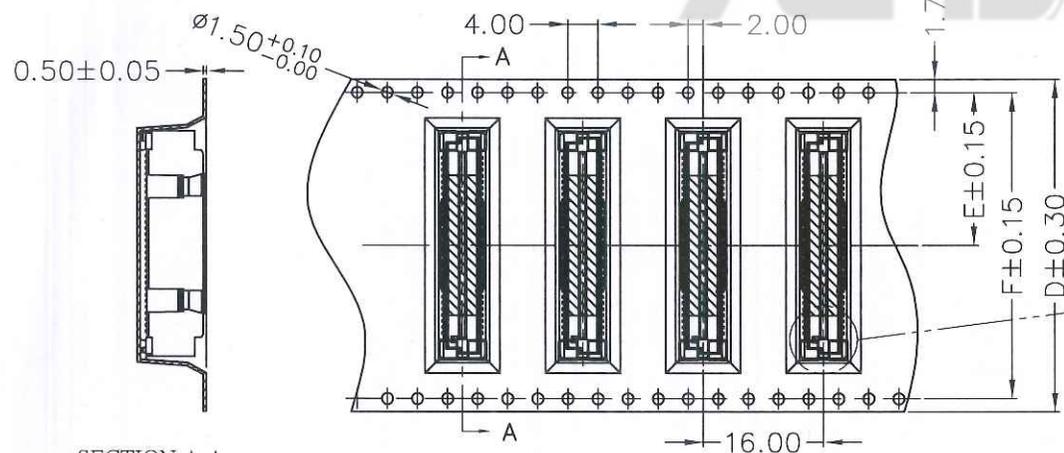

Loading direction mark

ITEM	P/N	DIM.F	DIM.E	DIM.D
REEL & FILM+REEL & MPAD+REEL	30PIN	40.40	20.25	44.00
	40PIN	40.40	20.25	44.00
	50PIN	40.40	20.25	44.00
	60PIN	40.40	20.25	44.00
	80PIN	52.40	26.25	56.00
	100PIN	68.40	34.25	72.00
	120PIN	68.40	34.25	72.00
	140PIN	84.40	42.25	88.00

ALASTREN

TOLERANCE TABLE

X ± 0.25	X° ± 3°
.X ± 0.20	.X° ± 2°
.XX ± 0.15	

SCALE 1:1

UNIT mm

SIZE A4

DRAWN

齐如军

CHECK

齐如军

APPROVE

齐如军

DATE

2019/11/08

DATE

2019/11/11

DATE

2019/11/11

DWG. NO.

600-0000-2021

PARTS NO.(INTENDED USE)

BEBAXXXBX00

TITLE


CUSTOMER DRAWING

REV.


1

SHEET

2/3

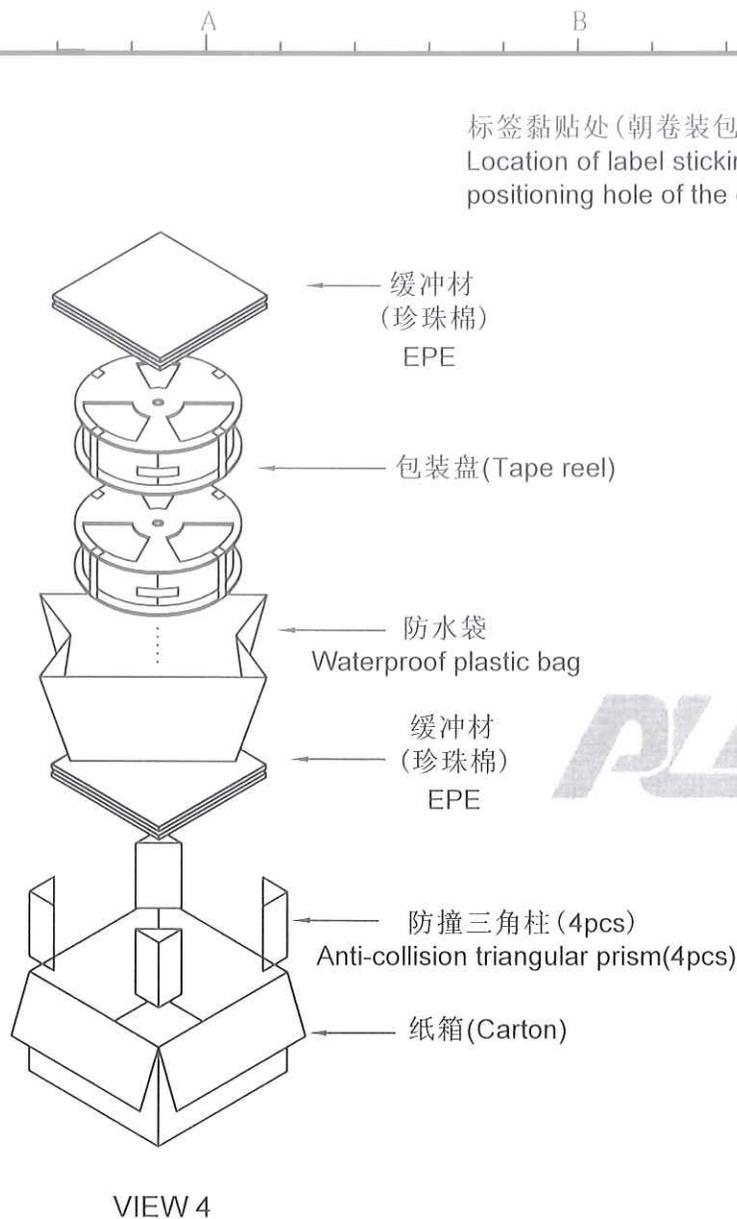

标签黏贴处 (朝卷装包材的小定位孔一侧)  
Location of label sticking (label at small positioning hole of the carrier tape side)

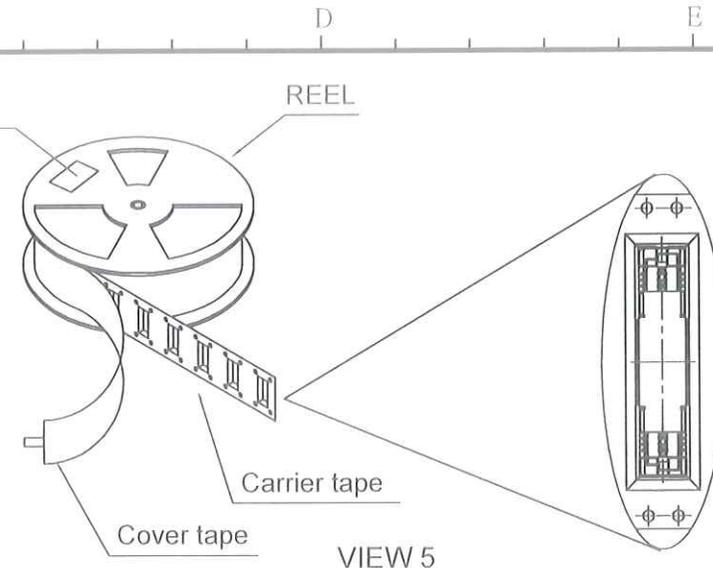

备注(NOTES):

- 每卷包装数量及每箱装箱数量如下表格。  
Packing q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。  
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。  
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱以胶带封口。  
Put reels in the carton and use adhesive tape to seal up.

产品料号 (Product No.)	包装容量(Packing capacity)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
BEBA030BX00	600	4	2400
BEBA040BX00	600	4	2400
BEBA050BX00	600	4	2400
BEBA060BX00	600	4	2400
BEBA080BX00	600	3	1800
BEBA100BX00	600	2	1200
BEBA120BX00	600	2	1200
BEBA140BX00	600	2	1200

PLASTREN

TOLERANCE TABLE

X. ± 0.25	X.° ± 3°
.X ± 0.20	.X° ± 2°
.XX ± 0.15	

SCALE 1:1

UNIT mm

SIZE A4

DRAWN

CHECK

APPROVE

齐如军

日期

DATE

DATE

2019/11/08

2019/11/11

2019/11/11

DWG. NO.

600-0000-2021

PARTS NO.(INTENDED USE)

BEBA0XXXBX00

TITLE

CUSTOMER DRAWING

REV.

1

SHEET 3/3