
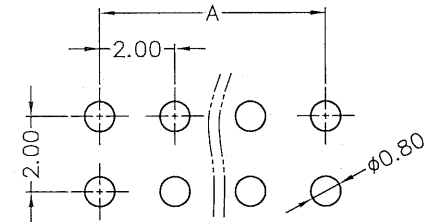

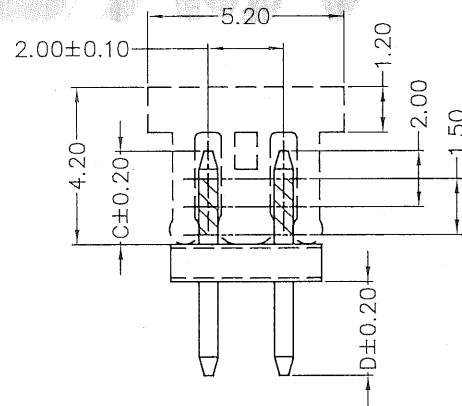
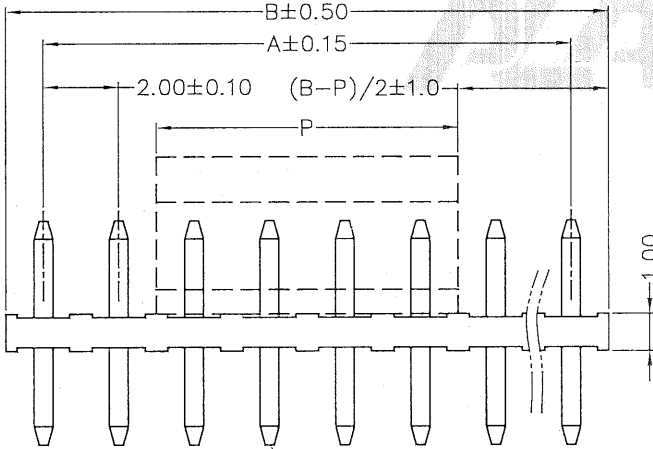


P/N	A	B
PAN-04*	2.00	4.00
PAN-06*	4.00	6.00
PAN-08*	6.00	8.00
PAN-10*	8.00	10.00
PAN-12*	10.00	12.00
PAN-14*	12.00	14.00
PAN-16*	14.00	16.00
PAN-18*	16.00	18.00
PAN-20*	18.00	20.00
PAN-22*	20.00	22.00
PAN-24*	22.00	24.00
PAN-26*	24.00	26.00
PAN-28*	26.00	28.00
PAN-30*	28.00	30.00
PAN-32*	30.00	32.00
PAN-34*	32.00	34.00
PAN-36*	34.00	36.00
PAN-38*	36.00	38.00
PAN-40*	38.00	40.00
PAN-42*	40.00	42.00
PAN-44*	42.00	44.00
PAN-46*	44.00	46.00
PAN-48*	46.00	48.00
PAN-50*	48.00	50.00
PAN-52*	50.00	52.00
PAN-54*	52.00	54.00
PAN-56*	54.00	56.00
PAN-58*	56.00	58.00
PAN-60*	58.00	60.00
PAN-62*	60.00	62.00
PAN-64*	62.00	64.00
PAN-66*	64.00	66.00
PAN-68*	66.00	68.00
PAN-70*	68.00	70.00
PAN-72*	70.00	72.00
PAN-74*	72.00	74.00
PAN-76*	74.00	76.00
PAN-78*	76.00	78.00

12PIN(含)以下	P=5.0	PAD0050
12PIN以上	P=8.0	PAD0002

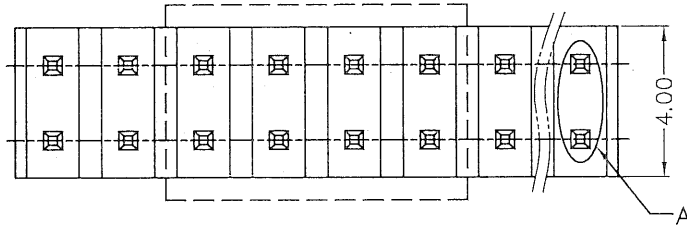

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

版次	ECN 编码	描述		设计/日期
4	CW10120065	改前	改后	胡亮波_2011/01/05
		/	增加无卤&包装选项	
5	EL21120145	/	更换新图框	刘恋_2021/12/28

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
 - Materials:
Insulator material: Thermoplastic, UL 94V-0; Color: Black.
Contact material: Copper Alloy
 - Current Rating: 2 A Per Pin.
 - Voltage Rating: 30V AC/DC.
 - Working Temperature: -40°C ~ +105°C.
 - Harmful material should be compliant to doc. "EI-0005" standards.
 - Product number matrix:

PAN-XX-X-C/D**

Number of Contacts	Code	
2	A	NULL: POLT BAG
3	B	G:TUBE
4	C	P:PAD+TUBE
5	D	R:PAD+REEL
6	E	NULL:With Halogen
7	F	H:Halogen Free
8	G	Pin Length mm
9	H	EX:040/014
10	I	C:4.00 D:1.40

Definition	Code
⊙ Tin plated	A
⊙ Gold plated	B
flash	B 15u" F
10u"	E 30u" J
⊙ Duplex plated	
flash	K 15u" P
10u"	N 30u" U
⊙ Standard: B	
All plating is lead free	

	TOLERANCE TABLE		SCALE 5:1	DRAWN 刘恋	DATE 2021/12/28	DWG. NO. 600-0000-0096	TITLE	REV. 5
	X. ± 0.30	X.° ± 3°	UNIT mm	CHECK 李昌博	DATE 2021/12/31	PARTS NO.(INTENDED USE) PAN-XX-X-C/D**	CUSTOMER DRAWING	SHEET 1/1
	.X ± 0.25	.X° ± 2°	SIZE A4	APPROVE 李昌博	DATE 2021/12/31			
	.XX ± 0.20							