

A

B

C

D

E





版次	ECN 编码	描述		设计/日期
1	EL24080030	初版发行		张文浩_2013/08/08
		改前	改后	

NOTES: (Unless otherwise specified)

- Dimension shall be interpreted per ANSI Y14.5M.
- Materials:
Housing: LCP(UL 94V-0), Color:Natural.
Actuator: LCP(UL 94V-0), Color:Black.
Terminal: Phosphor Bronze.
Solder Pin: Phosphor Bronze.
- Current Rating: 0.5A.
- Voltage Rating: 50Vrms AC .
- Working Temperature: -55°C ~ +85°C.
- Harmful material should be compliant to doc. "EI-0005" standards.
- Product number matrix:

FBEB XX RX BA
Number of Contacts

Plating Code:
Surface area:Plating Gold flash.
The bottom layer:Plating Ni 50u" ~ 120u".

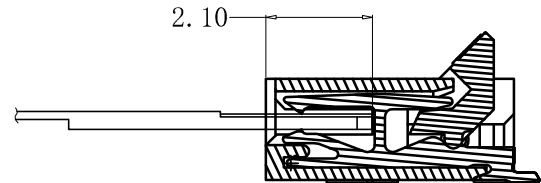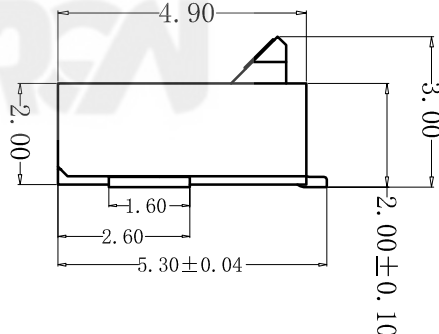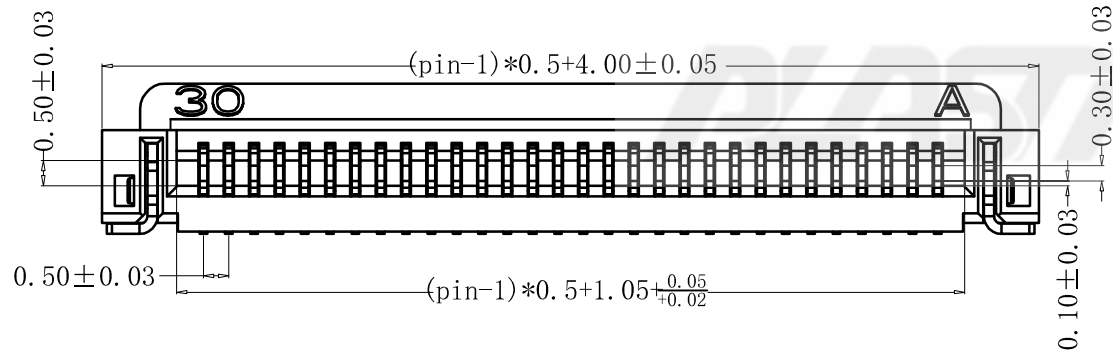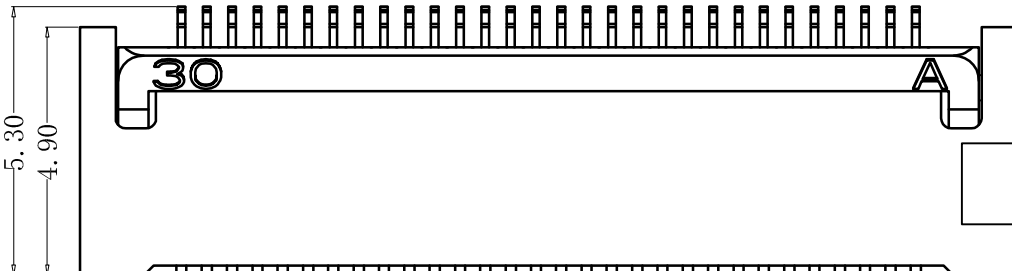

TOLERANCE TABLE		SCALE 4:1	DRAWN	张文浩	DATE	2013/08/08	DWG. NO.	TITLE	REV.
X.X ± 0.25	X.° ± 3°	UNIT mm	CHECK		DATE	2013/08/09	600-0000-2545	CUSTOMER DRAWING	1
X.XX ± 0.15	.X° ± 3°		APPROVE		DATE	2013/08/09	PARTS NO.(INTENDED USE) FBEBXXRXBA		SHEET 1/2

A


B

C


D

E

A B C D E

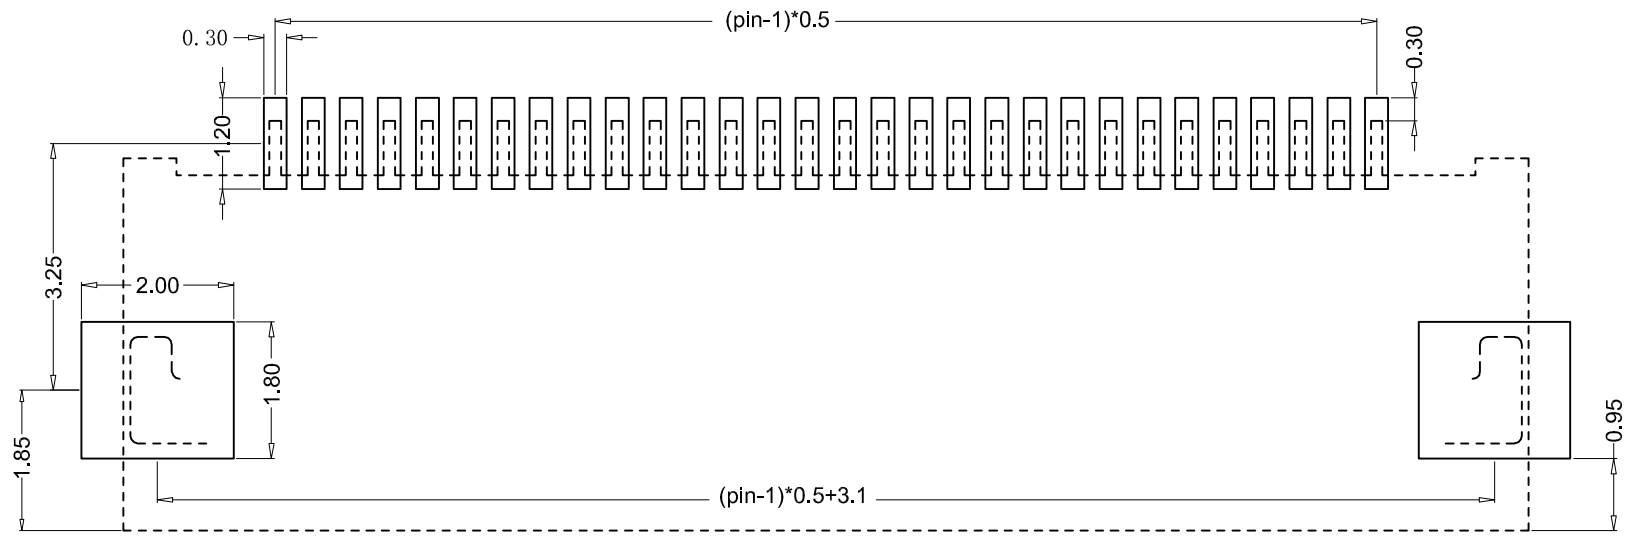

PCB LAYOUT

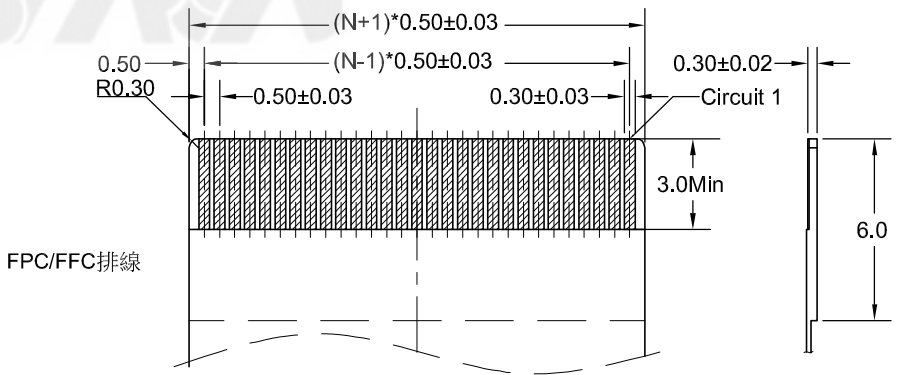

RECOMMENDED FPC/FFC DIMENSION



	TOLERANCE TABLE		SCALE 10:1	DRAWN	张文科	DATE	2013/08/08	DWG. NO.	600-0000-2545	TITLE	REV.
	X.X ± 0.25	X.° ± 3°	UNIT	mm	CHECK	DATE	2013/08/09	PARTS NO.(INTENDED USE)	CUSTOMER DRAWING	SHEET	1
	X.XX ± 0.15	.X° ± 3°	SIZE	A4	APPROVE	DATE	2013/08/09				2/2

A B C D E